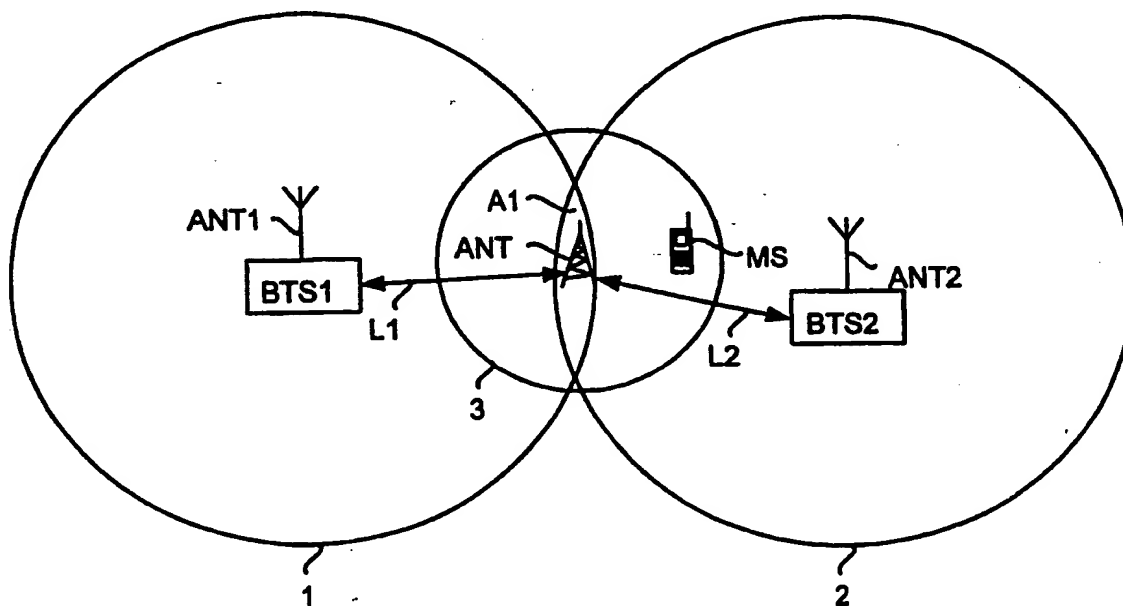


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04Q 7/36 // 7/30	A1	(11) International Publication Number: WO 98/25427 (43) International Publication Date: 11 June 1998 (11.06.98)
(21) International Application Number: PCT/FI97/00757 (22) International Filing Date: 4 December 1997 (04.12.97) (30) Priority Data: 964855 4 December 1996 (04.12.96) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventor; and (75) Inventor/Applicant (for US only): HOTTINEN, Ari [FI/FI]; Kielotie 30-32 C 25, FIN-01300 Vantaa (FI). (74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: CELLULAR RADIO SYSTEM WITH IMPROVED CHARACTERISTICS IN BORDER AREAS**(57) Abstract**

The present invention relates to a cellular radio system which includes base stations (BTS1, BTS2) comprising transceiver means and antenna means (ANT1, ANT2) for creating a radio connection to mobile stations (MS). In order to improve audibility within the border areas between base station coverage areas, the system comprises an antenna means (ANT), which is common at least to the first and the second base station (BTS1, BTS2) and which comprises means for further transmitting over the radio path signals received from the first and the second base station (BTS1, BTS2) and, correspondingly, means for feeding the signals received over the radio path to at least the first and the second base station (BTS1, BTS2).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Moongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

CELLULAR RADIO SYSTEM WITH IMPROVED CHARACTERISTICS IN BORDER AREAS

BACKGROUND OF THE INVENTION

This invention relates to a cellular radio system and particularly to efficient utilization of its capacity.

5 In prior art cellular radio systems base stations are arranged in such a way that the geographical areas they cover usually overlap to some extent. Therefore mobile stations located in the border areas of the coverage areas of the base stations usually can select among several alternative base stations, the one offering the best audibility. For practical reasons, however, the aim is
10 to arrange adjacent base stations in such a way that their overlapping coverage area is as small as possible. This allows a geographical area of a maximum size to be covered with a minimum number of base stations.

The overlapping coverage area of adjacent base stations being as small as possible has, however, caused problems. For instance, in the border
15 areas of the base station coverage areas there can be shadow regions where the audibility of the system is poor. A further problem is that the traffic capacity of one of the two adjacent base stations can be fully reserved, while the other can still have plenty of free traffic capacity available. In this case a mobile station trying to contact the fully reserved base station is not able to establish
20 a telecommunication connection, unless it happens to be located in the overlapping (as small as possible) coverage area of the base stations where both base stations are audible. In order to enable the traffic load to be more efficiently divided between the base stations, it would therefore be advantageous that the overlapping coverage area of adjacent base stations
25 would be as large as possible, whereby as many mobile stations as possible could select the base station among a plural number of base stations audible at the point concerned. This would, however, significantly increase the price of the system because more base stations would need to be built within an area of a specific size.

30 SUMMARY OF THE INVENTION

An object of the present invention is to solve the above mentioned problem and to provide a cellular radio system with a better audibility within the border areas between the base station coverage areas, which allows the overlapping coverage areas of adjacent base stations to be made larger,
35 without causing a significant increase in the price of the system and which

allows more efficient utilization of the traffic capacity available to the system. This object is achieved with a cellular radio system of the invention, said system including base stations which comprise transceiver means and antenna means for creating a radio connection to mobile stations located
5 within their radio coverage area and an antenna means, which is operationally connected to at least a first and a second base station and which comprises means for further transmitting over the radio path signals received at least from the first and the second base station and, correspondingly, means for feeding signals received over the radio path to at least the first and the second
10 base station. The cellular radio system of the invention is characterized in that, in order to adjust the load on said base stations, the system includes a control means for making said common antenna means to further transmit, at mutually different power levels, over the radio path the signals fed by the first and the second base station.

15 The invention is based on the idea that when also a common antenna means is arranged for the base stations, in addition to separate antennas of their own, and when the common antenna means is equipped in such a way that both the base stations can use it at the same time for communicating with mobile stations located within the area, then the audibility
20 of the system is significantly improved, because any shadow areas can then be eliminated more efficiently than before, without causing the need to increase the number of base stations. In a system like this the load on the base stations can be adjusted via the control unit in such a way that the control unit makes the antenna means to further transmit, at mutually different
25 power levels, the signals received from the first and the second base station. This allows stepless adjustment of the base station coverage areas, allowing at the same time the load on the radio cells maintained by adjacent base stations to be adjusted optimally.

Thus the most significant advantages the invention provides are
30 that it improves audibility within the border areas of the base station coverage areas, without significant additional costs, and at the same time it allows stepless levelling of the traffic load on adjacent base stations, performed by adjusting their coverage area, because a larger overlapping base station coverage area will include more mobile stations that can use either one of the
35 adjacent base stations for their connections. In addition, due to larger base station coverage areas the number of handovers is reduced and they can be

performed more smoothly than before, because at the moment of the handover the mobile station has already moved deep into the coverage area of the "new" base station, whereby the audibility between the new base station and the mobile station is better from the very beginning (after handover).

5 In a preferred embodiment of a cellular radio system of the invention the control means of the system can, e.g. on the basis of the prevailing traffic situation, connect the antenna means for the use of both the first and the second base station simultaneously or, alternatively, only for the first or the second base station. This embodiment of the invention allows more
10 efficient utilization of the traffic capacity available. In other words, if for instance the traffic capacity of the first base station is fully reserved at a particular moment, but the second base station at the same time still has plenty of free traffic capacity, the control unit can bring the common antenna means to a state where it is only available to the second base station. This
15 reduces the coverage area of the first base station and causes some of the mobile stations located within the overlapping coverage area of the first and the second base station to perform handover to the area of the second base station, which naturally releases traffic capacity at the first base station.

In the above mentioned embodiment the control unit is preferably
20 arranged to control the antenna means so that it will maintain the traffic load between the base stations as even as possible. The common antenna means is thus made unavailable to one of the base stations already long before the traffic capacity of the base station concerned is fully in use.

The control means controlling the common antenna element can be
25 the base station controller of one of the base stations. Alternatively, said control means can consist of an independent control unit arranged in connection with the common antenna means, said control unit controlling the common antenna means only on the basis of the data transmitted by the first and the second base station. Due to this it is possible not to burden the higher
30 levels of the system, such as the base station controller or the mobile services switching centre, with the control of the common antenna means.

Preferred embodiments of the cellular radio system of the invention are described in the attached dependent claims 2 - 7.

BRIEF DESCRIPTION OF THE DRAWINGS

35 In the following the invention will be described by way of example in more detail in connection with some preferred embodiments of a cellular radio

system of the invention, with reference to the attached drawings in which

Figure 1 is a block diagram illustrating a first preferred embodiment of a cellular radio system of the invention,

Figure 2 illustrates a preferred embodiment of a common antenna,

5 Figure 3 is a flow diagram illustrating the control of the common antenna in Figure 2, and

Figure 4 is a block diagram illustrating a second preferred embodiment of the cellular radio system of the invention.

DETAILED DESCRIPTION OF THE INVENTION

10 Figure 1 illustrates a first preferred embodiment of a cellular radio system of the invention. The cellular radio system shown in Figure 1 can be any cellular radio system known per se, e.g. a time division cellular radio system divided in channels according to a Time Division Multiple Access (TDMA) principle, such as a Groupe Spéciale Mobile (GSM) or a Digital
15 Cellular System (DCS). However, in the following it is assumed, by way of example, that the system in question is a spread spectrum system such as a Code Division Multiple Access (CDMA) system.

The coverage areas covered by antenna means ANT1 and ANT2 of base stations BTS1 and BTS2 shown in Figure 1 are illustrated by circles 1
20 and 2. Base stations BTS1 and BTS2 have been allocated individual logical channels of their own (e.g. different time slots in TDMA systems, different frequencies in FDMA systems or different spreading codes in CDMA systems), which they use in their connections. In order to ensure that no shadow regions are left within the overlapping coverage area A1 of base stations BTS1 and
25 BTS2, a common antenna ANT is arranged, in accordance with the invention, between the base stations, the coverage area of said antenna being illustrated with circle 3. The common antenna ANT comprises means for further transmitting over the radio path signals received via data transmission links L1 and L2 from base stations BTS1 and BTS2. Correspondingly, the common
30 antenna ANT comprises means for feeding signals received over the radio path both to base station BTS1 and base station BTS2 via data transmission links L1 and L2.

In the CDMA system in Figure 1 each base station is arranged to transmit an individual pilot signal of its own on the basis of which mobile
35 station MS distinguishes the base stations from each other and also selects

the base station that it will be using for its connections at a particular moment. In order to transmit pilot signals, a certain number of codes are reserved in the system in advance, one code being given for use to each base station. When the mobile station detects that the pilot signal it uses degrades below a
5 predetermined level, it selects another base station the pilot signal of which is received better. In Figure 1 the common antenna ANT is arranged to further transmit over the radio path the pilot signals of both base station BTS1 and base station BTS2. The pilot signal of base stations BTS1 and BTS2 in Figure 1 is thus transmitted from two different locations. The pilot signals of base
10 stations BTS1 and BTS2 received by mobile station MS shown in Figure 1 are thus substantially equally strong, said mobile station being assumed to be located at an equal distance from the common antenna ANT and antenna ANT2 of base station BTS2. It can therefore freely decide whether to use base station BTS1 or BTS2.

15 Figure 2 illustrates a preferred embodiment of a common antenna, which is suitable for use e.g. within the system shown in Figure 1. In the embodiment of Figure 2 antenna ANT' comprises switching means S1 and control unit 4, which can be used to guide antenna ANT' between three different alternative states.

20 Figure 2 only shows parts needed for antenna control, in addition to which antenna ANT' can also include other parts, such as transceiver units or amplifiers. What parts are needed in the antenna primarily depends on how data transmission between the base stations and the common antenna is arranged. Said data transmission can be performed e.g. with radio frequency
25 signals, in which case the received signals are amplified, branched and fed e.g. via cables to receivers at the base stations. In this case transmitted signals are correspondingly relayed at transmission frequency from the base stations, the antenna means including amplifiers for amplifying these signals and for feeding them to an antenna element. Alternatively, the common
30 antenna can include complete transmitters and receivers, in which case data transmission between the base stations and the common antenna can be performed in a binary form, using a data transmission connection known per se. This way it is possible to have the common antenna means to send the signal concerned only to one base station, i.e. specifically to the base station
35 the signal is destined to. This reduces the capacity needed in the data transmission connections between the base stations and the common antenna

means. In addition, it enables avoiding losses that occur when signals of a transmission frequency are transferred via cables from one location to another.

In the case shown in Figure 2 antenna ANT' is in a first state, which
5 means that it is only available to base station BTS1 (shown in Figure 1), i.e. only signals transmitted via data transmission link L1 are transmitted to antenna element 5 and, correspondingly, the signals received with antenna element 5 are fed forward only via data transmission link L1. In order to bring antenna ANT' to a second state, control unit 4 guides switching means S1 to a
10 second position, whereby only signals transmitted via data transmission link L2 are transmitted to antenna element 5 and, correspondingly, the signals received with antenna element 5 are fed forward only via data transmission link L2. In order to bring antenna ANT' further to a third state, control unit 4 guides switching means S1 to a third position, whereby both data transmission
15 link L1 and data transmission link L2 can be connected to antenna element 5 via connector and branching means 6. In this case antenna ANT' is available to both the first and the second base station.

In the embodiment shown in Figure 2 control unit 4 is arranged in connection with the common antenna ANT' where it receives from base
20 stations BTS1 and BTS2 data on their traffic loads. On the basis of these data control unit 4 guides switching means S1 in such a way that the traffic load of base stations BTS1 and BTS2 is made as even as possible. Thus the control of the common antenna ANT' does not increase the load on the higher levels of the system (such as the base station controller or the mobile services
25 switching centre). In addition, the common antenna ANT' can also easily be arranged in connection with two base stations controlled by separate base station controllers. Unlike in the case shown in Figure 2, the control of the common antenna can naturally also be arranged from the base station controller whereby a control unit like the one in Figure 2 is not needed in the
30 common antenna.

Figure 3 is a flow diagram illustrating the control of the common antenna ANT' shown in Figure 2. In the initial situation in block A it is assumed that the common antenna means is used by both the base stations. In this case the control unit receives data from base stations BTS1 and BTS2 on their
35 traffic situation.

In case base station BTS2 is significantly more loaded than base

station BTS1, the control unit guides in block C the common antenna ANT' to a state where it is only available to base station BTS1. Thus the coverage area of base station BTS2 in the area between the base stations increases and, correspondingly, the coverage area of base station BTS1 in the area between
5 the base stations is reduced. It can therefore be assumed that at least some of the mobile stations located within the area between the base stations will change over to use base station BST1 instead of base station BTS2, which levels the load on the base stations.

But if base station BTS1 is significantly more loaded than base
10 station BTS2, in block E the control unit guides the common antenna ANT' to a state where it is only available to base station BTS2, which will probably level the load on the base stations. In Figure 1, mobile station MS, which is assumed to be connected to base station BTS1 via the common antenna, then detects that the pilot signal it receives from base station BTS2 is significantly
15 stronger than the pilot signal from base station BTS1 and it performs a handover to base station BTS2.

But if the load on base stations BTS1 and BTS2 is approximately equal, in block G the control unit guides the common antenna to a state where it is available to both base station BTS1 and base station BTS2.

20 Figure 4 is a block diagram illustrating a second preferred embodiment of the cellular radio system of the invention. The embodiment in Figure 4 is very similar to that of Figure 1 from which it differs in that antenna ANT'' in Figure 4 is common to three base stations BTS1, BTS2 and BTS3 of which base stations BTS1 and BTS2 are controlled by a common base station
25 controller BSC1, whereas base station BTS3 is controlled by a second base station controller BSC2.

The common antenna ANT'' shown in Figure 4 preferably comprises a control unit corresponding to the description given in connection with Figure 2, which allows using it for levelling the traffic load between
30 different base stations BTS1, BTS2 and BTS3, without requiring control from base station controllers BSC1, BSC2 or from a mobile switching centre. Unlike in Figure 2, the control unit can, however, be of such type that it adjusts the load between the base stations by performing stepless adjustment of the transmission power of signals received from the different base stations in such
35 a way that the signals of the base station with the smallest load are transmitted with the highest power. In other words, the common antenna

means ANT" transmits the signals of different base stations BTS1, BTS2 and BTS3 at mutually different power levels. The power levels are determined by the control unit on the basis of the traffic load on the different base stations.

It is to be understood that the above description and the related
5 drawings are only meant to illustrate the present invention. Therefore e.g. two base stations can have several common antenna means, although the above case described by way of example concerns base stations with a single common antenna means. For persons skilled in the art it will be apparent that the invention can also be varied and modified in different ways without
10 deviating from the scope and spirit of the invention described in the attached claims.

CLAIMS

1. A cellular radio system which includes
base stations (BTS1, BTS2, BTS3) comprising transceiver means
and antenna means (ANT1, ANT2, ANT3) for creating a radio connection to
5 the mobile stations (MS) located within their radio coverage area, and
an antenna means (ANT, ANT', ANT'') which is operationally
connected to at least a first and a second base station (BTS1, BTS2) and
which comprises means for further transmitting over the radio path signals
received at least from the first and the second base station (BTS1, BTS2) and,
10 correspondingly, means for feeding signals received over the radio path to at
least the first and the second base station (BTS1, BTS2), characterized
in that,
in order to adjust the load on said base stations, the system
includes a control means for making said common antenna means to further
15 transmit, at mutually different power levels, over the radio path the signals fed
by the first and the second base station (BTS1, BTS2).
2. Cellular radio system according to claim 1, characterized
in that said common antenna means (ANT, ANT', ANT'') is placed at a distance
from the first and the second base station (BTS1, BTS2).
- 20 3. Cellular radio system according to claim 1 or 2,
characterized in that said control means is arranged to guide said
common antenna means to one of several alternative states in which
in a first state the common antenna means (ANT, ANT') is
operationally connected only to the first base station (BTS1) for further
25 transmitting over the radio path the signals fed by the first base station and,
correspondingly, for feeding the signals received over the radio path only to
the first base station (BTS1),
in a second state the common antenna means (ANT, ANT') is
operationally connected only to the second base station (BTS2) for further
30 transmitting over the radio path the signals fed by the second base station
and, correspondingly, for feeding the signals received over the radio path only
to the second base station (BTS2), and
in a third state the common antenna means (ANT, ANT') is
operationally connected to both the first and the second base station (BTS1,
35 BTS2) for further transmitting over the radio path the signals fed by the base
stations and, correspondingly, for feeding the signals received over the radio

path to the first and the second base station (BTS1, BTS2).

4. Cellular radio system according to any one of claims 1 - 3, characterized in that said control means (BSC1, 4, 6, S1) is responsive to the traffic load on the first and the second base station (BTS1, BTS2),
5 whereby the control means is arranged to guide the common antenna means (ANT, ANT') to said first state, when the traffic load on the second base station (BTS2) is significantly higher than the traffic load on the first base station (BTS1), and in that the control means is correspondingly arranged to guide the
10 common antenna means (ANT, ANT') to said second state, when the traffic load on the first base station (BTS1) is significantly higher than the traffic load on the second base station (BTS2).

5. Cellular radio system according to any one of claims 1 - 4, characterized in that the base station controller (BSC1) of the first or the second base station (BTS1, BTS2) forms said control means.

15 6. Cellular radio system according to claim 3 or 4, characterized in that the control means (4, 6, S1) consists of a separate control unit arranged in connection with the common antenna means (ANT').

7. Cellular radio system according to any one of claims 1 - 6,
20 characterized in that said system is a spread spectrum system, preferably a CDMA system.

1/3

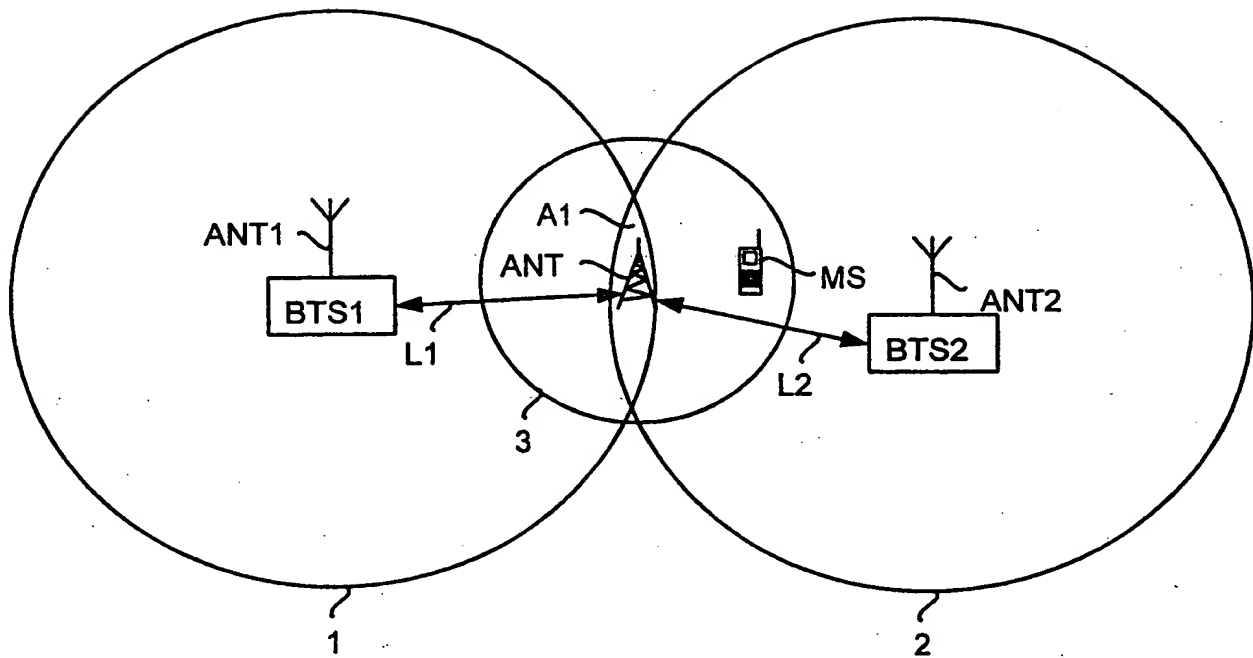


FIG. 1

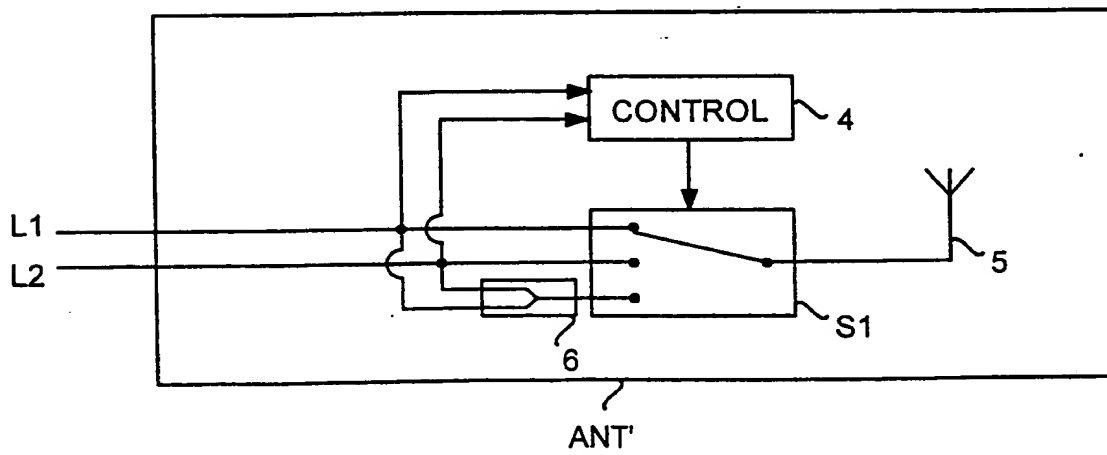


FIG. 2

2/3

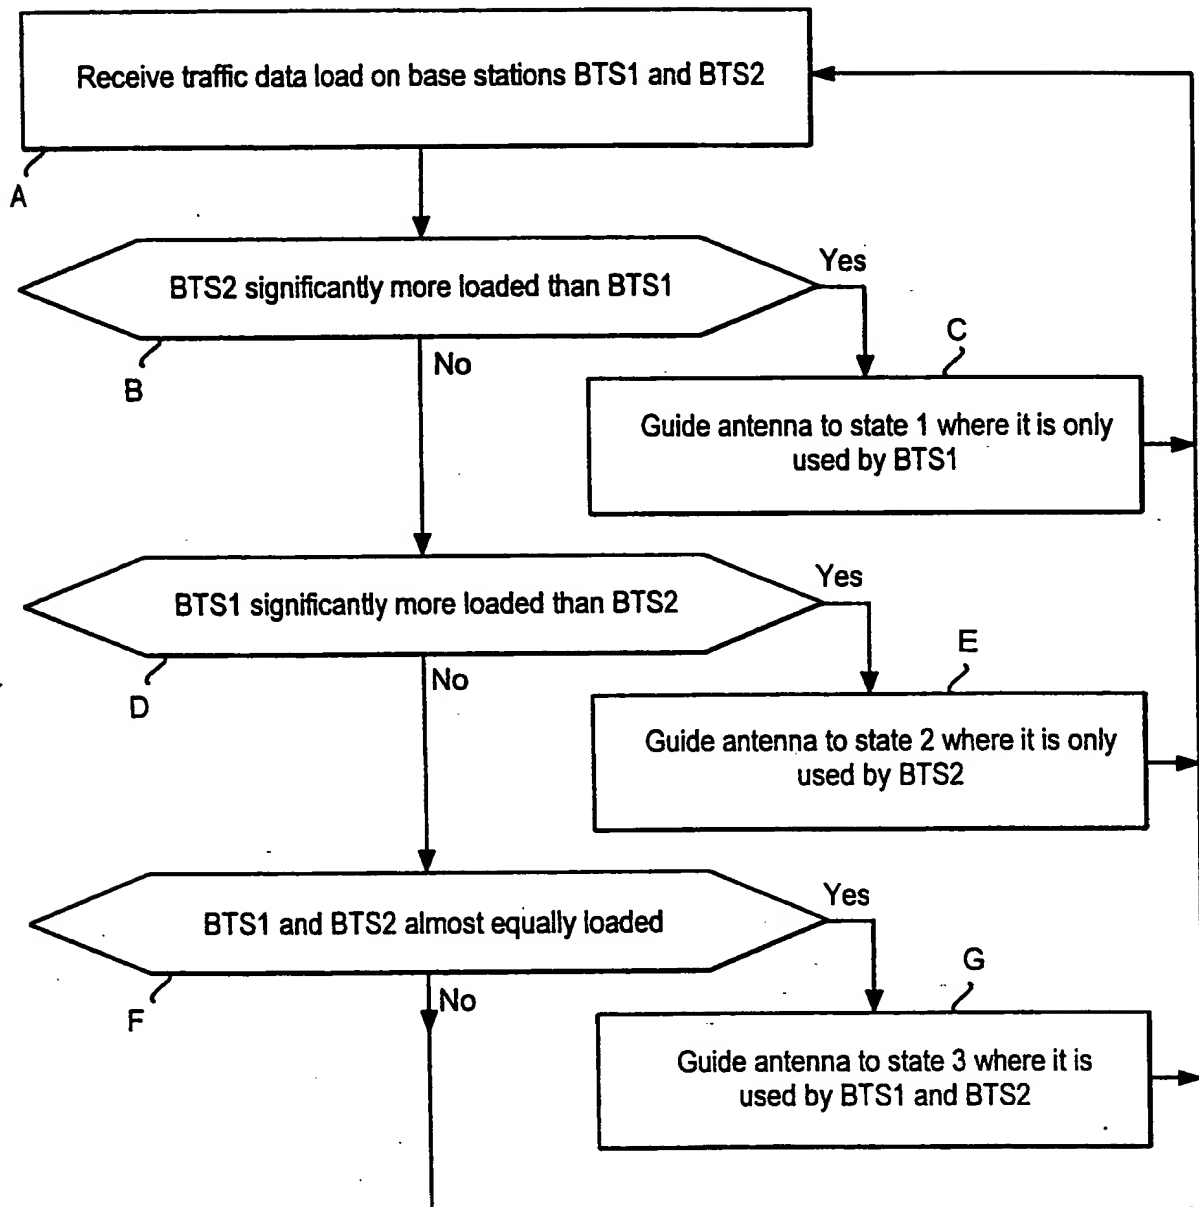


FIG. 3

3/3

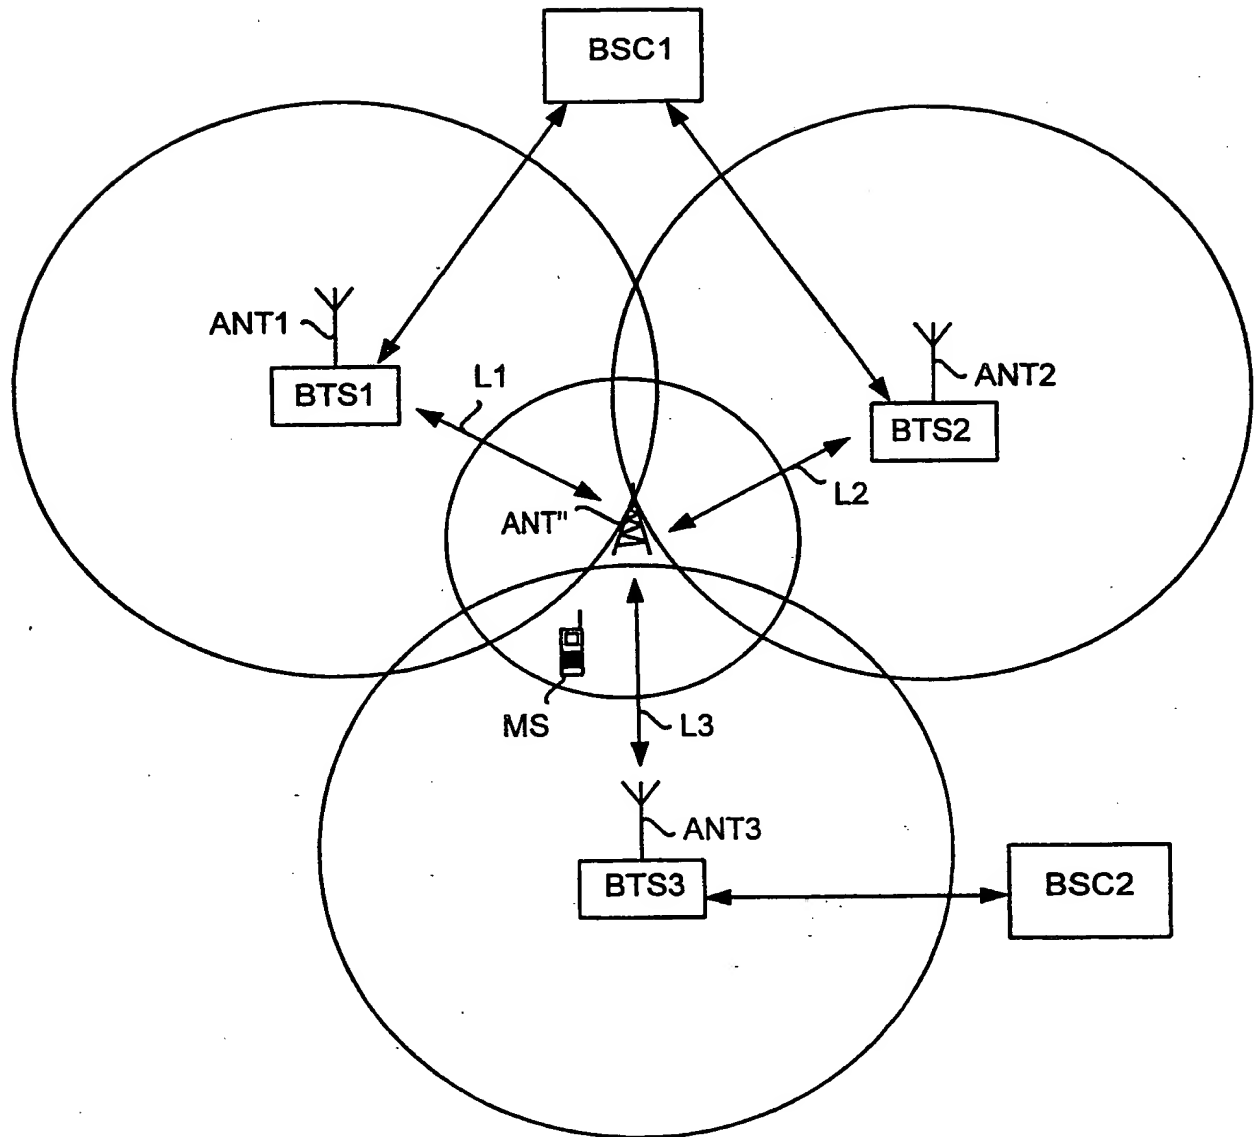


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00757

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/36 // H04Q 7/30
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0566551 A2 (TELEFONAKTIEBOLAGET LM ERICSSON), 20 October 1993 (20.10.93), abstract --	1-7
X	WO 9608119 A2 (TELIA AB), 14 March 1996 (14.03.96), page 12, line 6 - line 10, claim 1, abstract --	1-7
X	US 5428817 A (MASAHIKO YAHAGI), 27 June 1995 (27.06.95), column 1, line 54 - line 58; column 4, line 23 - line 57, claims 1,2, abstract --	1-7

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier document but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

5 May 1998

Date of mailing of the international search report

07 -05- 1998

Name and mailing address of the ISA/
 Swedish Patent Office
 Box 5055, S-102 42 STOCKHOLM
 Facsimile No. +46 8 666 02 86

Authorized officer

Martin Ek
 Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00757

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9638014 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 28 November 1996 (28.11.96), page 3, line 20 - page 5, line 9, claims 1,2, abstract -----	1-7

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/FI 97/00757

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0566551	A2	20/10/93	AU	670440 B	18/07/96
				AU	4283393 A	18/11/93
				AU	5071896 A	27/06/96
				BR	9305490 A	11/10/94
				FI	935638 D	00/00/00
				JP	6511609 T	22/12/94
				MX	9302150 A	31/08/94
				NZ	252815 A	28/05/96
				WO	9321739 A	28/10/93

WO	9608119	A2	14/03/96	EP	0777951 A	11/06/97
				SE	505006 C	09/06/97
				SE	9402886 A	01/03/96

US	5428817	A	27/06/95	JP	5344048 A	24/12/93

WO	9638014	A1	28/11/96	AU	5848996 A	11/12/96
				EP	0829177 A	18/03/98
